



Linco S100 | General Information

This great little actuator is perfect for situations where the lack of space is a concern. A very tough actuator the S100 is our smallest standardly produced unit and has been successfully used in both residential and commercial sites.

Great on louvre banks where there is only a few blades or the frame size is particularly small. However due to its stroke range of between 50mm to 300mm it can be used for just about anything you can think of.

The actuator is housed 'inline' in the same casing as the stroke and this is what has allowed the slimline design to be achieved. The casing

also protects the mechanical side of the actuator from dust and makes cleaning much easier.

With the S100 suitable for so many situations, including residential and commercial, the actuator can be coloured to suit the décor of the installation. The standard casing comes in anodised aluminium. Should you wish to change the colour it is a very simple process for us and we need no extension to our lead time.

If you have any questions about this or any other of our products please feel free to call us during business hours.

Linco S100 | Features

- Slimline design
- Compact size
- Standard anodised aluminium casing
- Simple installation
- Smooth actuator operation
- Compatible with all window frame types
- Various control options
- Stroke length of up to 300mm



Phone:
(07) 3265 5771

Fax:
(07) 3265 5662

Web:
www.uniquewindowsservices.com

Linco S100 Specifications

VOLTAGE	12vDC
LOAD CAPACITY - PUSH/PULL	150N/100N
LOCK FORCE	3000N
CURRENT UNDER LOAD	3A max.
STROKE LENGTH	50mm to 300mm
STROKE SPEED AT FULL LOAD	15mm/sec
OPERATING TEMPERATURE RANGE	-26°C to 65°C
LIMIT SWITCH	FACTORY SET
IP GRADE	IP54
ELECTRIC OVERLOAD CUT OFF	BUILT IN

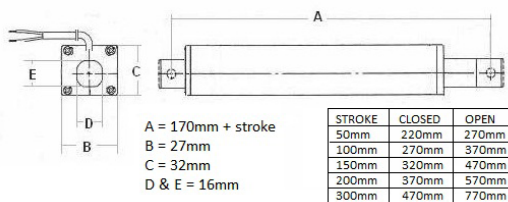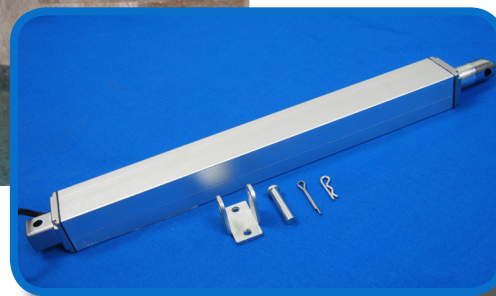

Linco S100 Specification Text

The louvre operating system is to be the Linco S100 with a predetermined stroke length and 2 in-built micro limit switches.

Actuators are to have sintered brass gear drives and be capable of performing a minimum of 10,000 strokes.

The actuators are available from Unique Window Services, (07) 3265-5771.

UNIQUE
WINDOW SERVICES

Phone:
(07) 3265 5771

Fax:
(07) 3265 5662

Web:
www.uniquewindowsservices.com